



CONSUMER PRODUCTS SERVICES DIVISION

TECHNO SOURCE

Technical Report: (5211)187-0298
Date Received: July 06, 2011

July 14, 2011
Page 1 of 13

Sample Description: 20Q ASSORTMENT

1.) RED
2.) BLUE
3.) PINK

Vendor: N/A
Manufacturer: On File

Sample Size: 36
Style No(s): 1061, 1062, 1063

Buyer: N/A
Labeled Age Grade: 6+
Appropriate Age Grade: OVER 6 YEARS OF AGE
Client Specified Age Grade: NOT SPECIFIED

SKN/SKU No.: N/A
PO No.: N/A
Ref #: N/A
Country of Origin: CHINA

Tested Age Grade: OVER 6 YEARS OF AGE
UPC Code: 801561010619, 801561010626,
801561010633

Assortment No.: (1060)

Test Finished Date: July 11, 2011
Terminal voltage: 3.00V

EXECUTIVE SUMMARY:

The sample(s) MEET the following requirement(s):

- The tested requirements of the applicable sections of the Rules and Regulations details in 47 C.F.R., Part 15 of the Federal Communication Commission (FCC) of United States of America and Industry Canada Interference-Causing Equipment Standard ICES-003.

BUREAU VERITAS HONG KONG LIMITED

Law Yiu Tung
Assistant Manager
Electrical Department

LYT/se



SUMMARY OF TEST RESULTS

The sample submitted COMPLIES with the tested requirements of the applicable sections of the Rules and Regulations detailed in 47 C.F.R., Part 15 of the Federal Communication Commission (FCC) of United States of America and Industry Canada Interference-Causing Equipment Standard ICES-003

Tests Required For Unintentional Radiator:

Test Executed	Test Requirement	Test Method	Limit	Status
Measurement of Radiated Emissions	Section, 15.109 CFR47, FCC Part 15	Section 15.31, 47 CFR, FCC Part 15 ANSI C63.4-2003	See Section 15.109 CLASS B	Meet
Measurement of Conducted Emissions on AC Mains	Section 15.107 CFR47, FCC Part 15	Section 15.31, 47 CFR, FCC Part 15 ANSI C63.4-2003	See Section 15.107 CLASS B	N. A.

N. A. = Not Applicable



Test Results:

Measurement of Radiated Emissions:

Requirements: FCC PART 15, SECTION 15.109

Limit: Section 15.109 Class B

Port under test: Enclosure

Test equipment:

Description	Brand Name	Model No.
EMI Test Receiver	Rohde & Schwarz	ESCS 30
Bilog Antenna	Schaffner	CBL6112D
Biconical Antenna	Rohde & Schwarz	HK 116
Log-Periodic Antenna	Rohde & Schwarz	HL 223
Open Area Test Site (range = 3m)	None	None
Full Anechoic Chamber (7m x 3m x 3m)	Albatross Projects	M-CDC
Automatic Antenna Mast	Rainer Schäfer	RSM 010
Automatic Turntable	Rainer Schäfer	RST 020
Antenna Mast / Turntable Controller	Rainer Schäfer	RSC
Coaxial Cable No. 2	Uniradio	None
Coaxial Cable No. 6	Unknown	None
Coaxial Cable No. 3	Suhner	None
Coaxial Cable No. 4	Suhner	None
Loop Antenna	Schaffner	HLA 6120

Test method:

Location of test facilities:

The EMC laboratory is located at the following address:

No. 2106-2107, 21/F, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

The test facility has been found in compliance with the requirement of Section 2.948 of the FCC rules. The information has been placed on file and listed by FCC with Registration No. 642151.

The operational mode(s) under test:

The operational modes under test are determined according to the typical use of the Equipment-Under-Test (EUT) with respect to the expected highest level of emission. During the test, various parts of the EUT system are exercised in a manner permitting detection of all system disturbances.



The frequency range of radiated measurements:

The frequency range of radiated measurements is determined pursuant to Section 15.33.

For an unintentional radiator, unless otherwise specified, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below 9 kHz, up to the frequency list in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.707 – 108	1000
108 –500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, which ever is lower.

Limits of radiated Emissions:

The limits of radiated emissions are specified in the appropriate Sections of the FCC rules that the EUT is subject to, and the provisions in Section 15.35.

Unless otherwise specified in the Rules, on any frequency or frequencies below or equal to 1000 MHz, the limits are based on measuring equipment employing a CISPR quasi-peak detector. For frequencies above 1000 MHz the radiated limits are based upon the use of measurement instrument employing an average detector, with a minimum resolution bandwidth of 1MHz.

When average radiated emission measurements are specified in Part 15, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit, unless a different peak emission limit is otherwise specified.


Measurement method of radiated emissions:

Measurements are carried out on the open area test site (OATS) located on the roof of the EMC laboratory, in accordance with CISPR 22 as a basic standard at a measurement range of 3 meters. The test site has, by verification measurements, satisfied the normalized site attenuation (NSA) requirements specified in the standard CISPR 22. For measurement at each test frequency, the antenna-to-EUT azimuth is varied through 360°. The antenna is also scanned between 1 m to 4 m in height above the ground plane to maximize the level of radiated disturbances. The reading on the measuring receiver is observed for about 15 s for each final measurement; the highest readings shall be recorded with the exception of any isolated spike which shall be ignored.

For measurements of undesired spurious emissions, if the measurement results are 20 dB lower than the corresponding permissible limit levels, they can be confidently regarded as having satisfied the limit requirement applied. No records of these measurement results are required.

For the measurements at frequencies with high ambient disturbance signals existing, verification tests may be carried out in the Full Anechoic Chamber (FAC) as an auxiliary method to confirm whether there is any emission of radiated disturbances from the EUT. If there is no maximum disturbance level from the EUT other than the corresponding intrinsic noise floor of measuring system (which is at least 20 dB below the limit level), then it can be stated confidently that the measurement result obtained at OATS is due to the signal levels of ambient signal sources, not from the EUT.

Test Set-up:

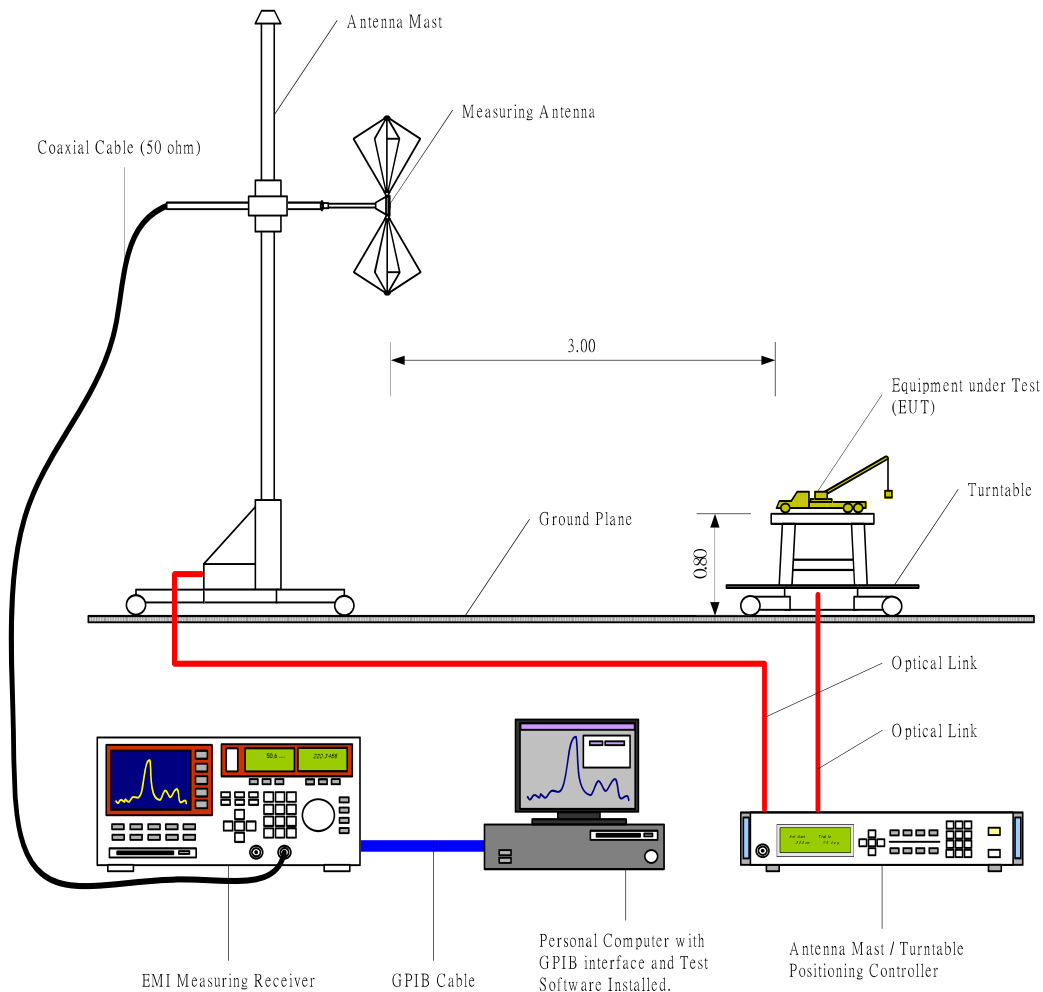

With hand-held or portable EUT exploratory radiated emission test shall be carried out, including rotation of the EUT through three orthogonal axes to determine the attitude that highest emission relative to the limit. The so found attitude and equipment arrangement shall be used in the final measurement.

In frequency range of 9kHz to 30MHz, a calibrated Loop antenna shall be applied for measuring radiated emissions. The Loop antenna shall be positioned with its plane vertical. The centre of the loop shall be 1m above ground plane and 3m apart from the EUT placed on the turntable. The Loop antenna shall be rotated about its vertical axis to maximize the radiated emission measured.



Results:

Operational mode under test: On mode (with sound, light)

EUT operating condition:

(a) System Configuration

The EUT system is regarded as a portable apparatus and tested as a desktop device.

The EUT is configured and tested as a stand-alone unit.

(b) Antenna (if applicable):

Not applicable



TECHNO SOURCE
Technical Report: **(5211)187-0298**
July 14, 2011
Page 7 of 13

Spurious Emissions of Unintentional Radiator: On mode (with sound, light)

- Pursuant to SECTION 15.109

The measurement results are found to be more than 20dB below the permissible limit. They can then be confidently regarded as having satisfied the limit requirement applied. No record of measurement results is therefore required.


Conducted Emissions on AC mains port (150 kHz – 30 MHz)

Standard: FCC PART 15, SECTION 15.107
Limit applicable: Section 15.107, Class B
Port under test AC Input

Test equipment:

Description	Brand Name	Model No.
EMI Test Receiver	Rohde & Schwarz	ESCS 30
Artificial Mains Network (AMN)	Rohde & Schwarz	ESH3-Z5
Pulse Limiter	Rohde & Schwarz	ESH3-Z2
Reference Ground Plane	None	None
Digital Multi-meter	Fluke	Fluke 26 III

Test Set-up:

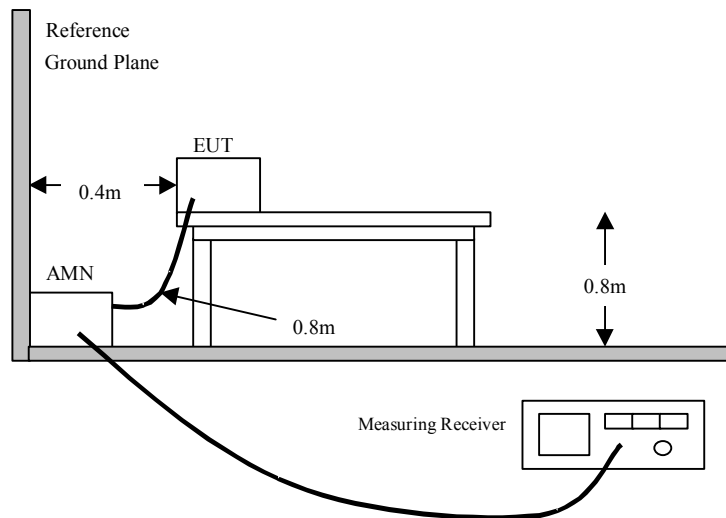

Test method:

Select the AC mains supply voltage by varying the AC mains voltage over the range of 0.9 to 1.1 times the rated voltage to maximize the level of disturbance voltage measured at about 160 kHz.

Perform an initial measurement on each line with peak detectors to identify the frequencies where the maximum disturbances may occur. Then measure and record the maximum disturbances with quasi-peak and average detectors. The reading on the measuring receiver is observed for about 15 s for each measurement; the highest readings shall be recorded with the exception of any isolated spike which shall be ignored.

The final measurements shall be carried out at least at all frequencies at which there is a maximum.

The operational modes under test are determined according to the typical use of the EUT with respect to the expected highest level of emission. During the test, various parts of the EUT system are exercised in a manner permitting detection of all system disturbances

Results:

The test is not applicable to the product because it has no AC mains power port.

END of Test Data



TECHNO SOURCE
Technical Report: **(5211)187-0298**
July 14, 2011
Page 9 of 13

**The General FCC Requirements
in Labeling and Instruction Manual
for Part 15 Devices Subject to
Verification
(Informative)**

The following paragraphs provide general information of labeling on most of the devices subjected to verification authorization and requirements of FCC Part 15. The responsible party (i.e. the manufacturer or the importer within the United States) shall refer to the original and updated Rules (e.g. FCC Part 2, and Part 15, etc.) for acquiring information of updated or additional specific requirement for each individual device.

Device Identification:

All devices subject to verification are required to have an identification label pursuant to Section 2.954 of the Rules. Additional labeling requirements may be specified in the particular sections of the FCC rules governing the specific class of equipment. The label showing the equipment identification data may be combined with a label showing other information (serial numbers, other governments requirements, etc.), if desired. This unique identifier must be displayed on the device.

Under NO circumstances shall verified equipment be labeled with a FCC Identifier (FCC ID), or in any manner which implies that such equipment has been approved by the FCC.

The suggested identification label format for equipment subject to verification is illustrated as shown below:

**Model No. 123
Company's name or trade name
Country of origin #**

Country of origin - U.S. Customs and the Federal Trade Commission regulations require all equipment produced in foreign countries to be marked with the country of origin.

Label of Compliance Statement:

Devices subject to FCC Part 15, Subpart B verification must be labeled with the statement(s) pursuant to Section 15.19 (a) of the Rules.

FM broadcast radio receivers or the other receivers associated with the operation of a licensed radio service shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

A *stand-alone cable input selector switch* for cable TV shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase, as described in Section 2.925(d) of the FCC Part 2.

Note:

"*Permanently affixed*" means that the label is etched, engraved, stamped, silkscreened, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable.

"*Readily visible*" means that the nameplate or nameplate data must be visible from the outside of the equipment enclosure

Information to User

Pursuant to Section 15.21 of the Rules, the users manual or instruction manual shall include the following *or similar* statement to caution the user:

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Pursuant to Section 15.105 of the Rules, the users manual or instruction manual of Class A digital devices shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

For a Class B digital device or peripheral, the user manuals or instructions shall include the following *or similar* statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



TECHNO SOURCE
Technical Report: **(5211)187-0298**
July 14, 2011
Page 11 of 13

The user manual may also be required to include other information for users if the device is subject to the provisions of any specific sections of the Rules. For example:

- TV interface devices marketed as a kit, information for users pursuant to Section 15.25 shall be provided.
- If special accessories, e.g. shielded cables and / or special connectors, are required for enabling the compliance to FCC Rules, they shall be explicitly specified in the user manuals or instructions pursuant to the Section 15.27.

In cases where the manual is provided only in a form other than paper, such as on a computer disk or over the Internet, the information required by this section may be included in the manual in that alternative form, provided the user can reasonably be expected to have the capability to access information in that form.



The Canadian EMC Requirements

If devices have been tested and comply with FCC regulation (FCC Part 15), no retesting is required to show compliance with ICES-003. However, additional equipment label requirement is required which must be in form of a label affixed to the device in both English and French.

Regulatory Statement

A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement included in the user's manual.

Suggested test for the notice indicating compliance with the standard of ICES-003

'The Class [*] digital apparatus complies with Canadian ICES-003.'

'Cet appareil numérique de la classe [*] est conforme à la norme NMB-003 du Canada'

[*] Insert either 'A' or 'B' but not both as appropriate for the equipment requirements



END